

PRE-GRAPHITIC CARBONACEOUS INSERTION COMPOUNDS
AND USE AS ANODES IN RECHARGEABLE BATTERIES

FIELD OF THE INVENTION

5

The invention pertains to the field of carbonaceous materials and, in particular, to pre-graphitic carbonaceous insertion materials. Additionally, the invention pertains to the field of rechargeable batteries and, in particular,
10 to rechargeable batteries comprising carbonaceous anode materials.

BACKGROUND OF THE INVENTION

15

The group of pre-graphitic compounds includes carbonaceous materials that are generally prepared at low temperatures (eg: less than about 2000°C) from various organic sources and that tend to graphitize when annealed at higher temperatures. There are however both hard and soft pre-graphitic carbon compounds, the former being difficult to
20 graphitize substantially even at temperatures of order of 3000°C, and the latter, on the other hand, being virtually completely graphitized around 3000°C.

25

The aforementioned set of compounds has been of great interest for use as anode materials in lithium-ion or rocking chair type batteries. These batteries represent the state of the art in small rechargeable power sources for consumer electronics applications. These batteries have the greatest energy density (Wh/L) of conventional
30 rechargeable systems (ie. NiCd, NiMH, or lead acid batteries). Additionally, lithium ion batteries operate around 3½ volts which is often sufficiently high such that a single cell can suffice for many electronics applications.

35

Lithium ion batteries use two different insertion compounds for the active cathode and anode materials. Insertion compounds are those that act as a host solid for the reversible insertion of guest atoms (in this case, lithium atoms). The structure of the insertion compound

host is not significantly altered by the insertion. In a lithium ion battery, lithium is extracted from the anode material while lithium is concurrently inserted into the cathode on discharge of the battery. The reverse processes occur on recharge of the battery. Lithium atoms travel or "rock" from one electrode to the other as ions dissolved in a non-aqueous electrolyte with the associated electrons travelling in the circuit external to the battery.

The two electrode materials for lithium ion batteries are chosen such that the chemical potential of the inserted lithium within each material differs by about 3 to 4 electron volts thus leading to a 3 to 4 volt battery. It is also important to select insertion compounds that reversibly insert lithium over a wide stoichiometry range thus leading to a high capacity battery.

A 3.6 V lithium ion battery based on a LiCoO_2 / pre-graphitic carbon electrochemistry is commercially available (produced by Sony Energy Tec.) wherein the carbonaceous anode can reversibly insert about 0.65 Li per six carbon atoms. (The pre-graphitic carbon employed is a disordered form of carbon which appears to be similar to coke.) However, the reversible capacity of lithium ion battery anodes can be increased by using a variety of alternatives mentioned in the literature. For example, the crystal structure of the carbonaceous material affects its ability to reversibly insert lithium (as described in J.R. Dahn et al., "Lithium Batteries, New Materials and New Perspectives", edited by G. Pistoia, Elsevier North-Holland, p1-47, (1993)). Graphite for instance can reversibly incorporate one lithium per six carbon atoms which corresponds electrochemically to 372 mAh/g. This electrochemical capacity per unit weight of material is denoted as the specific capacity for that material. Graphitized carbons and/or graphite itself can be employed under certain conditions (as for example in the presentation by Matsushita, 6th International Lithium Battery Conference,

Muenster, Germany, May 13, 1992, or in U.S. Patent No. 5,130,211).

Other alternatives for increasing the specific capacity of carbonaceous anode materials have included the addition of other elements to the carbonaceous compound. For example, Canadian Patent Application Serial No. 2,098,248, Jeffrey R. Dahn et al., 'Electron Acceptor Substituted Carbons for Use as Anodes in Rechargeable Lithium Batteries', filed June 11, 1993, discloses a means for enhancing anode capacity by substituting electron acceptors (such as boron, aluminum, and the like) for carbon atoms in the structure of the carbonaceous compound. Therein, reversible specific capacities as high as 440 mAh/g were obtained with boron substituted carbons. Canadian Patent Application Serial No. 2,122,770, Alfred M. Wilson et al., 'Carbonaceous Compounds and Use as Anodes in Rechargeable Batteries', filed May 3, 1994, discloses pre-graphitic carbonaceous insertion compounds comprising nanodispersed silicon atoms wherein specific capacities of 550 mAh/g were obtained. Similarly, specific capacities of about 600 mAh/g could be obtained by pyrolyzing siloxane precursors to make pre-graphitic carbonaceous compounds containing silicon as disclosed in Canadian Patent Application Serial No. 2,127,621, Alfred M. Wilson et al., 'Carbonaceous Insertion Compounds and Use as Anodes in Rechargeable Batteries', filed July 8, 1994.

Recently, practitioners in the art have prepared carbonaceous materials with very high reversible capacity by pyrolysis of suitable starting materials. At the Seventh International Meeting on Lithium Batteries, Extended Abstracts Page 212, Boston, Mass. (1994), A. Mabuchi et al. have demonstrated that pyrolyzed coal tar pitch can have reversible specific capacities as high as 750 mAh/g at pyrolysis temperatures about 700°C. K. Sato et al. in Science 264, 556, (1994) disclosed a similar carbonaceous material prepared by heating polyparaphenylene at 700°C which has a reversible capacity of 680 mAh/g. S. Yata et

al., Synthetic Metals 62, 153 (1994) also disclose a similar material made in a similar way. These values are much greater than that of pure graphite. The aforementioned materials can have a very large irreversible capacity as evidenced by first discharge capacities that can exceed 1000 mAh/g. Additionally, the voltage versus lithium of all the aforementioned materials has a significant hysteresis (ie. about 1 volt) between discharge and charge (or between insertion and extraction of lithium). In a lithium ion battery using such a material as an anode, this would result in a similar significant hysteresis in battery voltage between discharge and charge with a resulting undesirable energy inefficiency.

It is not understood why the aforementioned carbonaceous materials have very high specific capacity. (However, J. Dahn et al., Electrochimica Acta, Vol. 3, No.9, p. 1179-1191, 1993 speculated on the possibility of certain unorganized carbons exceeding the capacity of graphite via lithium adsorption on single graphite layers contained within. Also, in the aforementioned reference by K. Sato et al., Li dimer formation was proposed as an explanation for the very high specific capacity of their carbonaceous material.) All these materials were prepared at temperatures of about 700°C and are crystalline enough to exhibit x-ray patterns from which the parameters d_{002} , L_c , a , and L_a can be determined. (The definition and determination of these parameters can be found in K. Kinoshita, "Carbon - Electrochemical and Physicochemical Properties", John Wiley & Sons 1988.) Also, all have substantial amounts of incorporated hydrogen as evidenced by H/C atomic ratios that are greater than 0.1, and often near 0.2. Finally, it appears that pyrolyzing at higher temperature degrades the specific capacity substantially with a concurrent reduction in the hydrogen content. (In the aforementioned reference by Mabuchi et al., pyrolyzing the pitch above about 800°C results in a specific capacity decrease to under 450 mAh/g

with a large reduction in H/C. Similar results were found in the aforementioned reference by Yata et al.)

The prior art also discloses carbonaceous compounds with specific capacities higher than that of pure graphite made from precursors that form hard carbons on pyrolysis. However, the very high specific capacities of the aforementioned materials pyrolyzed at about 700°C were apparently not attained. A. Omaru et al, Paper #25, Extended Abstracts of Battery Division, p34, Meeting of the Electrochemical Society, Toronto, Canada (1992), disclose the preparation of a hard carbonaceous compound containing phosphorus with a specific capacity of about 450 mAh/g by pyrolyzing polyfurfuryl alcohol. The polyfurfuryl alcohol in turn had been prepared from the monomer polymerized in the presence of phosphoric acid. In Japanese Patent Application Laid Open number 06-132031, Mitsubishi Gas Chemical disclose a hard carbonaceous compound comprising 2.4% sulfur with a specific capacity of about 500 mAh/g. These hard carbonaceous compounds have additional elements incorporated therein and have all been pyrolyzed at sufficient temperature such that they contain little hydrogen (ie. the H/C atomic ratio is substantially less than 0.1). These hard carbonaceous compounds neither exhibited the very high specific capacities nor the same serious hysteresis in voltage of the aforementioned materials pyrolyzed at about 700°C.

Additionally, other high capacity carbonaceous materials have recently been prepared which show high capacity for lithium and little or no voltage hysteresis. In Paper 2B05 at the 35th Battery Symposium in Nagoya, Japan, Nov. 14-16, 1994, Y. Takahashi et al. describe materials with reversible capacities of about 480 mAh/g, but do not give the details of their preparation. In paper 2B09 at the same Symposium, N. Sonobe et al. describe hard carbon materials made from petroleum pitch with reversible capacities near 500 mAh/g. The synthesis procedure therein was not given.

Japanese patent application laid open number 06-089721 discusses the high capacity advantages of hard disordered carbons in terms of the parameters P_s (the fraction of stacked carbon), n_{ave} (the number of graphene sheets per stack), and SI (the stacking index). Therein, SI is defined by the height of the {002} peak relative to the local background. Therein, carbonaceous compounds having values of SI below 0.76 were claimed and the examples provided had a minimum SI of 0.67. Reversible capacities for lithium up to 460 mAh/g were obtained. However, voltage curves (and hence hysteresis characteristics) and irreversible capacities were not reported. Additionally, discussion and data regarding hydrogen contents after pyrolysis and surface area accessible to non-aqueous electrolyte were not provided.

SUMMARY OF THE INVENTION

This invention comprises novel carbonaceous insertion compounds with a high reversible capacity for alkali metal insertion, methods of preparing said insertion compounds, and the use of said insertion compounds as electrode materials in electrochemical devices in general. The alkali metal can be lithium and, in such a case, the insertion compound can have a low irreversible capacity and a small voltage hysteresis between insertion and extraction.

Carbonaceous insertion compounds of the invention comprise a pre-graphitic carbonaceous host and atoms of an alkali metal inserted therein. The alkali metal inserted can be lithium as would be the case for use in lithium ion batteries. The empirical parameter R , as determined from an x-ray diffraction pattern of the host and defined as the {002} peak height divided by the background level, is less than about 2.2. To achieve a large stoichiometry range for reversible insertion of alkali metal, R is preferably less than about 2, and most preferably less than about 1.5. The

H/C atomic ratio of the host is less than about 0.1. The pre-graphitic host has a surface area accessible to non-aqueous electrolyte that is sufficiently small such that the irreversible capacity is less than about a half that of the reversible capacity, and preferably less than about a third that of the reversible capacity. The non-aqueous electrolyte can be a solution comprising ethylene carbonate and diethyl carbonate.


Electrochemical methods are preferably used to determine reversible and irreversible capacities after which an accessible surface area can be deduced. However, other physical characteristics can be used to estimate the accessible surface area. For example, methylene blue absorption capacity and BET (a standard nitrogen adsorption test) surface area provide such estimates. When the methylene blue absorption capacity of the carbonaceous host is less than about 4 micromoles per gram of host or when the surface area of the carbonaceous host as determined by BET is less than about 300 m²/gram, the accessible surface area can be sufficiently small to meet the capacity requirements.

Suitable carbonaceous hosts can be rendered unsuitable by relatively mild oxidation without overly dramatic effects on methylene blue absorption. On the other hand, the BET surface area may increase substantially but still be in a range considered acceptable in principle. It has been found that a mildly oxidized carbonaceous host can comprise enough surface oxygen such that more than 5% by weight is lost after pyrolyzing at about 1000°C under inert gas. Thus, suitable carbonaceous hosts preferably have not been oxidized after preparation. Suitable carbonaceous hosts typically lose less than about 5% by weight under such inert pyrolysis conditions.

The pre-graphitic carbonaceous host can generally be prepared by pyrolyzing an epoxy precursor, phenolic resin precursor, carbohydrate precursor or a carbohydrate containing precursor at a temperature above about 700°C,

thereby predominantly removing hydrogen from the precursor. However, the pyrolysis temperature cannot be too high in order that the empirical parameter R, determined from an x-ray diffraction pattern of the host and defined as the {002} peak height divided by the background level, remains less than about 2.2. Alkali metal atoms can be inserted into the host thereafter by conventional chemical or electrochemical means to make insertion compounds of the invention.

If an epoxy precursor is used, the epoxy precursor can be an epoxy novolac resin and can comprise a hardener in a range from zero to about 40% by weight. The hardener can be phthallic anhydride and the epoxy can be cured at about 120°C before pyrolysis. The maximum pyrolysis temperature can be attained by ramping at from about 1°C/min to about 20°C/min. A possible embodiment of the invention can be prepared by pyrolyzing an epoxy novolac resin having the formula

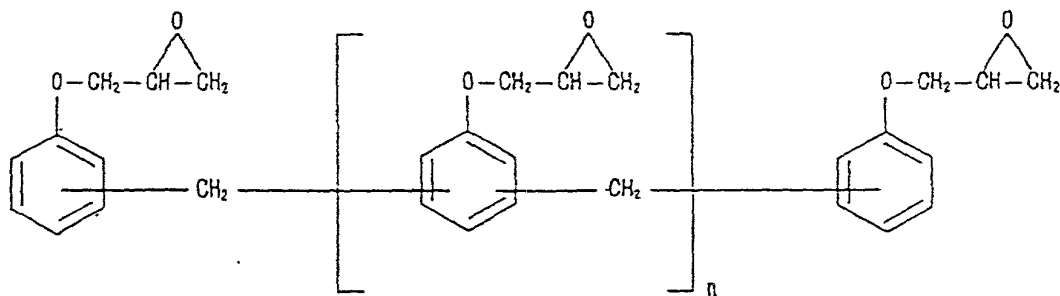


Epoxy Novolac Resin

$n = 1.6$

at a maximum temperature below about 1100°C.

Alternatively, the epoxy precursor can be a bisphenol A epoxy resin. The maximum pyrolysis temperature can be attained by ramping at about 30°C/min. A possible embodiment of the invention can be prepared by pyrolyzing a bisphenol A epoxy resin having the formula

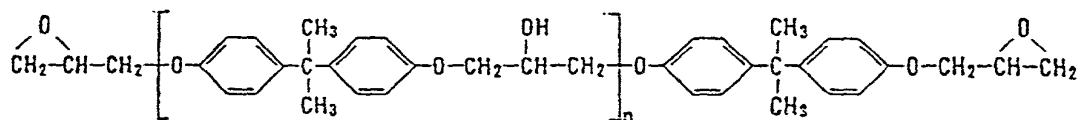

5 Bisphenol-A Epoxy Resin

$$n = 12$$

at a temperature about 800°C.

10 If a phenolic resin precursor is used, the pyrolysis temperature can preferably be above about 800°C and the empirical parameter R is preferably less than about 1.6 in order to achieve a large stoichiometry range for reversible insertion of alkali metal.

15 The phenolic resin precursor can be of the novolac or the resole type. The latter can be preferably pyrolyzed at a temperature in the range from about 900°C to about 1100°C. Both types can be cured at about 150°C before pyrolysis. The pyrolysis temperature for both types can be maintained for about one hour.

20 If a carbohydrate precursor or carbohydrate containing precursor is used, the pyrolysis temperature can be preferably above about 800°C and the empirical parameter R is preferably less than about 2. Along with other previously mentioned advantages, such hosts can have relatively large tap density, often exceeding 0.7 g/ml.

25 Such a carbohydrate precursor or carbohydrate containing precursor can be selected from the group consisting of sugar, starch, and cellulose or substances containing these materials. Specifically, the carbohydrate precursor can be sucrose, starch, or the cellulose in red oak, maple, walnut shell, filbert shell, almond shell, cotton or straw.

30 The pyrolysis can be performed at a temperature in the range from about 900°C to about 1100°C for about an hour. It can be advantageous to attain the pyrolysis temperature quickly, for example by ramping at a rate of about 25°C per minute.

It can be advantageous to precarbonize the carbohydrate by washing with an acid (such as concentrated sulfuric acid) before pyrolysis.

Compounds of the invention can be used as a portion of an electrode in various electrochemical devices based on insertion materials (eg. supercapacitors, electrochromic devices, etc.). A preferred application for these compounds is use thereof as an electrode material in a battery, in particular a non-aqueous lithium ion battery comprising a lithium insertion compound cathode; a non-aqueous electrolyte comprising a lithium salt dissolved in a mixture of non-aqueous solvents; and an anode comprising the carbonaceous insertion compound of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows the definition of R on an almost featureless x-ray diffraction pattern of a pre-graphitic carbon in the region around the {002} peak.

Figure 2 shows a cross-sectional view of a conventional lithium ion spiral-wound type battery.

Figure 3 depicts an exploded view of the laboratory coin cell battery used in the Examples.

Figure 4 shows the H/C atomic ratio versus pyrolysis temperature for the samples of Prior Art Example 2 and of Epoxy Example 1.

Figure 5 shows the x-ray diffraction patterns in the vicinity of the {002} peak for some of the samples of Prior Art Example 2. The patterns have been offset vertically by 2000 counts for clarity.

Figures 6a and 6b show the voltage versus capacity plots for some of the batteries of Prior Art Example 2.

Figure 6a is an expanded version of Figure 6b in the region near zero volts. The points at which lithium plating and stripping occur are indicated by arrows for the battery comprising the 550°C pyrolyzed sample. The plots in each
5 Figure are offset sequentially by 0.05 volts and 0.1 volts respectively for clarity.

Figure 7 shows the x-ray diffraction patterns in the vicinity of the {002} peak for the M20E activated carbon
10 samples of the Illustrative Example re activated carbons.

Figure 8 shows the second cycle voltage versus capacity plot for the battery containing M30 activated carbon pyrolyzed at 1000°C of the Illustrative Example re acti-
15 vated carbons.

Figure 9 shows the first cycle voltage versus capacity plot for the battery containing M30 activated carbon pyrolyzed at 1000°C of the Illustrative Example re acti-
20 vated carbons.

Figure 10 compares the second cycle voltage versus capacity plots of sample no. I of Epoxy Example 1 to that of the 700°C pyrolyzed sample of Prior Art Example 2.
25

Figure 11 shows the x-ray diffraction patterns in the vicinity of the {002} peak for samples I, II, and III of Epoxy Example 1. The patterns have been offset vertically by 1600 counts for clarity.
30

Figures 12a and 12b show the voltage versus capacity plots of samples I, II, III, and IV of Epoxy Example 1. Figure 12a is an expanded version of Figure 12b in the region near zero volts. The points at which lithium
35 plating and stripping occur are indicated by arrows for the battery comprising sample IV. The plots in each Figure are

offset sequentially by 0.05 volts and 0.1 volts respectively for clarity.

Figures 13a and 13b show the voltage versus capacity plots of samples V, VI, VII, and IX of Epoxy Example 1 and illustrates the relation between R and specific capacity for samples pyrolyzed at 1000°C to 1100°C. Figure 13a is an expanded version of Figure 13b in the region near zero volts. The points at which lithium plating and stripping occur are indicated by arrows for the battery comprising sample VII. The plots in each Figure are offset sequentially by 0.05 volts and 0.1 volts respectively for clarity.

Figure 14 shows the x-ray diffraction pattern in the vicinity of the {002} peak for the samples of Figures 13a and b. The patterns have been offset vertically by 3000 counts for clarity.

Figure 15 shows a summary plot of specific capacity versus R for sample nos. III to IX inclusive of Epoxy Example 1.

Figure 16 shows the voltage versus capacity plot of the first discharge and charge of the battery comprising sample no. VII of Epoxy Example 1.

Figures 17a and 17b show the voltage versus capacity plots of a battery of Epoxy Example 2. Figure 17a is an expanded version of Figure 17b in the region near zero volts.

Figures 18a and 18b show the voltage versus capacity plots for the first and second cycles respectively for batteries comprising samples prepared from the A type precursor in Phenolic Resin Example 1. The curves have been offset sequentially for clarity. (In both Figures,

the shifts are 0.0, 0.15, 0.3, 0.45, and 0.7 volts for sample A700, A800, A900, A1000, and A1100 respectively.)

Figures 19a and 19b show the voltage versus capacity plots for the first and second cycles respectively for batteries comprising samples prepared from the B type precursor in Phenolic Resin Example 1. The curves have been offset sequentially for clarity. (In Figure 19a, the shifts are 0.0, 0.1, 0.25, 0.3, and 0.4 volts for sample B700, B800, B900, B1000, and B1100 respectively. In Figure 19b, the shifts are 0.0, 0.1, 0.3, 0.5, and 0.8 volts for sample B700, B800, B900, B1000, and B1100 respectively).

Figures 20a and 20b show the voltage versus capacity plots for the first and second cycles respectively for batteries comprising samples prepared from the C type precursor in Phenolic Resin Example 1. The curves have been offset sequentially for clarity. (In both Figures, the shifts are 0.0, 0.15, 0.3, and 0.45 volts for sample C800, C900, C1000, and C1100 respectively.)

Figure 21 shows the capacity versus cycle number for the battery comprising sample B1000 of Phenolic Resin Example 1.

Figure 22 shows the voltage versus capacity plots for the second cycle of batteries comprising samples prepared from the B type precursor in Phenolic Resin Example 2. The plots have been sequentially offset by 0.1V for clarity.

Figure 23 shows the powder x-ray diffraction profiles for the directly pyrolyzed sucrose samples (numbers 1, 2, 4, 5, 6, and 7) of the carbohydrate and carbohydrate containing precursors examples. The data presented has been offset sequentially by 500 counts for clarity.

Figure 24 shows the powder x-ray diffraction profiles for samples pyrolyzed at 1000° C from starch and cellulose precursors (numbers 14, 15, 16, 17, and 18). The data have been offset sequentially by 500 counts for clarity.

5

Figures 25a and b show the voltage versus capacity plots for the second cycle for representative batteries comprising sample numbers 8, 2, 10, 11, and 12 pyrolyzed between 700°C and 1100°C. Figure 25a is a magnified view of a portion of Figure 25b. The onset of lithium plating during discharge and the termination of lithium stripping during charge is indicated by the vertical lines for sample 8 in Figure 25a. The data has been offset sequentially for clarity by 0.05V in Figure 5a and by 0.1V in 25b.

10

15

Figures 26a and b show the voltage versus capacity plots for the second cycle for representative batteries comprising sample numbers 2, 18, 14, 16, and 15 pyrolyzed at 1000°C. Figure 26a is a magnified view of a portion of Figure 26b. The data has been offset sequentially for clarity by 0.05V in Figure 26a and by 0.1V in 26b.

20

Figure 27 shows the capacity versus cycle number for the two batteries containing electrodes made from sample number 8.

25

Figure 28 shows the capacity versus cycle number for one of the two batteries containing electrodes made from sample number 14.

30

Figure 29 shows the capacity versus cycle number for the two batteries containing electrodes made from sample number 18.

35

Figure 30 compares the voltage profiles of cycles 5 and 6 of the batteries comprising carbohydrate precursor

sample number 8 and phenolic resole resin precursor sample B1000.

Figure 31 shows the differential capacity versus voltage during 5th cycle charging of the two batteries of Figure 30.

Figure 32 shows the x-ray diffraction patterns of several oxidized samples from the Illustrative Examples re burnoff.

Figures 33a (magnified view) and b show the voltage versus capacity plots for the second cycle of representative batteries from the Illustrative Examples re burnoff.

Figures 34a and b show plots of the intensity versus scattering angle and $\ln(\text{intensity})$ versus q^2 respectively for the samples from the Illustrative Examples re small angle scattering.

DETAILED DESCRIPTION OF THE SPECIFIC EMBODIMENTS OF THE INVENTION

Insertion compounds of the invention comprise hard pre-graphitic carbonaceous hosts having very poorly stacked graphene layers, little hydrogen content, and a small surface area accessible to common non-aqueous electrolyte solutions.

The carbonaceous hosts of said compounds can be derived from pyrolysis products of suitable precursors. Suitable precursors are those that can be pyrolyzed such that little hydrogen remains (ie. such that the H/C atomic ratio is less than about 0.1) and yet such that the host does not graphitize to such an extent that the empirical parameter R as determined by x-ray diffraction pattern exceeds about 2.2.

Herein, the empirical parameter R is used for purposes of describing such disorganized structures and is determined by dividing the {002} peak height by an estimate of the background level at the Bragg angle corresponding to the position of the {002} peak. R provides a convenient empirical means of quantifying the degree of graphitization of these compounds which have almost featureless x-ray diffraction patterns. Figure 1 illustrates the definition of R on a representative, almost featureless x-ray diffraction pattern of a pre-graphitic carbon in the region around the {002} peak. A tangential line is drawn below, but in the immediate vicinity of, the {002} peak to exclude the background. The point where a parallel line just intersects the peak defines the position of the maximum peak height. The value B in Figure 1 thus indicates the {002} peak height and the value A indicates the background estimate. R can thus be used to distinguish the stacking order in very disorganized materials. To quantitatively measure R reproducibly, all of the x-ray beam of the diffractometer must be confined to the carbon sample in the angular range of interest (ie. from 10° to 35° when a copper target x-ray tube is used).

R is related to the aforementioned parameter SI of the prior art. When the local background is relatively flat and/or if the {002} peak is relatively large compared to the background, SI is approximately equal to $1 - (1/R)$. The prior art claimed SI values below 0.76 and showed carbonaceous examples having a minimum SI value of 0.67. Using the approximate conversion formula, these values correspond to R of 4.2 and 3.0 respectively.

This type of insertion compound can have a high reversible capacity for alkali metal insertion. When the alkali metal is lithium, the insertion compounds additionally can have a low irreversible capacity and a small voltage hysteresis between insertion and extraction. It appears necessary for the carbonaceous host to have a small surface area accessible to common non-aqueous electrolyte

solutions in order to obtain these additional advantages. This is especially important for application in lithium ion batteries. Electrolyte reactions that consume lithium occur at the anode surface in such batteries. Thus, use of
5 an anode having a large surface area accessible to electrolyte results in substantial irreversible capacity loss and electrolyte loss. These losses are avoided if the anode surface is not accessible to the electrolyte. The surface area of the carbonaceous hosts accessible to common non-
10 aqueous electrolytes is not directly measurable though. However, it can be inferred to a certain extent by the observed irreversible capacity of the lithium-carbon insertion compound. Desirably, the accessible surface area is such that the irreversible capacity is less than about
15 half that of the reversible capacity for practical application in lithium ion batteries. Preferably, the irreversible capacity is smaller still, being less than about a third that of the reversible capacity.

A method for estimating the accessible surface area
20 can be employed that is based on the absorption of methylene blue (commonly used for activated carbons). In the literature (see for example, Active Carbon by H. Jankowska, A. Swiatkowski, J. Choma, translated by T.J. Kemp, published by Ellis Horwood, New York, 1991),
25 methylene blue (MB) is considered to have an equivalent minimum linear dimension of 1.5 nm. That is, MB is expected to penetrate into pores having diameters greater than 1.5 nm. Although non-aqueous electrolyte solutions can have equivalent linear dimensions smaller than this,
30 generally those of interest for commercial applications might be of that order in size. Thus, it was estimated that if certain areas of a sample were not accessible to MB, then these same areas would also not be accessible to electrolyte.

35 The electrolyte-accessible surface area was often sufficiently small if the methylene blue absorption capacity of the carbonaceous host was found to be less than about 4

micromoles per gram of host. However, compounds have been synthesized that meet the methylene blue criterion yet still appear to have unacceptably large electrolyte-accessible surface area. This is demonstrated in the Illustrative examples to follow.

The BET method is a conventional way of measuring surface area accessible to nitrogen. This too provides a means of estimating the electrolyte-accessible surface area of the carbonaceous host. The electrolyte-accessible surface area can be sufficiently small when corresponding BET surface area values are as high as about 300 m²/gram of host. However, hosts might conceivably have larger BET surface areas and still have sufficiently small electrolyte-accessible surface area.

It has been discovered that carbonaceous hosts of the invention which have been slightly oxidized can have significantly increased electrolyte-accessible surface area without exceeding or significantly exceeding the aforementioned methylene blue absorption or the BET criteria. Thus, oxidizing represents a means of ruining otherwise suitable carbonaceous hosts. Also, oxidizing represents a means for fine tuning the characteristics of the hosts such that the electrolyte-accessible surface area of the host cannot be adequately distinguished by the aforementioned methods of estimating. Such oxidation results in the formation of surface oxides which can be subsequently removed by pyrolyzing at high temperature (eg. 1000°C) under inert gas. Under these circumstances, a weight loss of 5% or more can be indicative of a host ruined by oxidation. Conversely, a weight loss of less than about 5% after oxidation can be indicative of a suitable carbonaceous host. This is demonstrated in the Illustrative examples to follow.

As is known to those skilled in the art, the capacity values of lithium carbonaceous insertion compounds can vary depending on the choice of non-aqueous electrolyte employed. Certain choices might always result in large

irreversible capacity values. A solvent mixture known in the art to be associated with low irreversible capacities comprises ethylene carbonate and diethyl carbonate. Electrolytes based on this solvent mixture can be suitable for evaluating the electrolyte-accessible surface area.

Various precursors can be pyrolyzed to provide the aforementioned type of carbonaceous hosts that have a high reversible capacity for alkali metal insertion. Certain epoxies, phenolic resins, carbohydrates and/or carbohydrate containing compounds have all been found to be suitable precursors. Suitable precursors include those that, when pyrolyzed at temperatures above about 700°C, do not graphitize to such an extent that the empirical parameter R as determined by x-ray diffraction pattern exceeds about 2.2.

Herein, the term epoxy refers to that group of thermosetting resins based on the reactivity of the epoxide group (as per the definition in The Condensed Chemical Dictionary, Ninth Ed., Van Nostrand Reinhold, 1977). Common members of this group include bisphenol A-based epoxies and epoxy novolac resins. These are particularly suitable epoxies that, when pyrolyzed above 700°C, provide pre-graphitic carbonaceous hosts that do not exhibit severe hysteresis in voltage upon insertion or extraction of lithium. When pyrolyzed at temperatures such that R is below 2.2, these hosts exhibit very high specific capacities for lithium. The specific capacity for lithium increases as R decreases. Thus, smaller values of R appear preferable in general. This is illustrated in the epoxy precursor examples to follow wherein R appears to be preferably less than about 2 and most preferably less than about 1.5.

Phenolic resins can also be suitable precursors and can offer some advantages over epoxies in this application. The pyrolysis of epoxy novolac resins (eg. DEN 438, trademark of DOW) gives product yields near 30%. It is well known however that phenolic resins (or phenol-formaldehyde

resins) can also be pyrolysed to give hard carbons with high yield (as for example mentioned in E. Fitzer et al., Carbon 7, 643 (1969). Since the former can cost about \$5 per pound versus about \$1.00 per pound for the latter at the time of this writing, a cost advantage might be expected for phenolic resin precursors.

Suitable phenolic resin precursors include those of the novolac or resole type. Based on the phenolic resin precursor examples to follow, it appears preferable to pyrolyze these precursors at temperatures above about 800°C in order to provide pre-graphitic carbonaceous hosts that do not exhibit severe hysteresis in voltage upon insertion or extraction of lithium and that are also characterized by low H/C atomic ratios. Smaller values of R appear preferable as illustrated in these examples wherein R appears to be preferably less than about 1.6.

The McGraw-Hill Dictionary of Scientific and Technical Terms, McGraw-Hill, Inc., New York, defines a carbohydrate as any of the group of organic compounds composed of carbon, hydrogen, and oxygen, including sugars, starches and celluloses. The carbohydrate precursors of the subject invention encompass all carbohydrates composed of carbon, hydrogen and oxygen.

The sugars can comprise monosaccharides (simple sugars), disaccharides (more complex sugars including sucrose, the common table sugar), and polysaccharides, the latter comprising the entire starch and cellulose families. Starch is a polymer of α -D-glucose while cellulose is a polymer of β -D-glucose. The glucose rings in cellulose have a different relative orientation than in starch. Isomers or compounds with such orientation differences can behave radically differently in biochemical processes. However, in inorganic processes, such differences may not matter. For example, the physical characteristics and electrochemical behaviour of insertion compounds prepared by pyrolyzing different isomers would likely be the same.

The use of carbohydrates as a precursor offers certain advantages over epoxy and/or phenolic resin precursor options. While phenolic resins can be relatively inexpensive compared to epoxies and can give higher yields when
5 pyrolyzed (near 60%), the pyrolysis process generates substantial amounts of tarry residue which is difficult to dispose of and may be carcinogenic.

Naturally occurring carbohydrates are attractive precursors because they are plentiful and relatively
10 inexpensive. For example, oak (predominantly consisting of cellulose) can cost about \$0.08 per pound. Even with a pyrolysis yield of 20%, this can result in a cost for the product that is about 5 times less than the corresponding cost for phenolic resin derived product. Additionally,
15 carbohydrate precursors can lead to product with a high tap density which is needed for high volumetric energy density in lithium ion batteries. Finally, carbohydrate precursors can result in less tarry residue per gram of carbon produced than do phenolic resin precursors.

20 We have discovered that pyrolyzing suitable carbohydrate precursors, and carbohydrate containing precursors, above 800°C can provide pre-graphitic carbonaceous hosts which have low H/C atomic ratios (<0.1). Additionally, pyrolyzing at temperatures such that R is below 2.2 provides for hosts with very high specific capacities for
25 lithium. The specific capacity for lithium increases as R decreases. As shown in the carbohydrate precursor examples to follow, pyrolysis products can be prepared with R values less than about 2 that have large reversible capacities.
30 These products also have methylene blue absorption values less than 4 micromoles per gram and BET values less than 300 m²/gram and do not exhibit large irreversible capacities nor severe hysteresis in voltage upon insertion or extraction of lithium. Tap densities as high as 0.7 g/ml can
35 also be achieved.

Regardless of precursor(s) employed, the pyrolysis should be performed under a controlled atmosphere to

prevent formation of undesired oxides of carbon. A suitable reaction system could consist of a reaction tube (quartz for example) installed in a conventional tube furnace wherein the tube has sealed inlet and outlet connections for purposes of controlling the atmosphere therein. The precursor(s) could thus be pyrolyzed in the reaction tube under an inert gas flow or even under reduced or elevated pressure.

The electrolyte-accessible surface area of the pyrolyzed product should be relatively small. In general therefore, it is undesirable to oxidize the precursor during pyrolysis as this would be expected to result in an increase in this area. Since the by-product gases of pyrolysis include unwanted oxidizing gases, it is desirable to remove these quickly.

Ramping the furnace temperature relatively quickly to the pyrolysis temperature and minimizing the pyrolysis period can also be generally desirable in order to minimize graphitization of the product. In the case of epoxy or phenolic resin precursor(s), to ensure good product yields, both should ideally substantially pyrolyze rather than simply evaporate. This issue must be considered in the selection of preferred precursor(s). It can therefore be advantageous to cure, or cross-link, the precursor before pyrolysis. The extent of such curing may be a significant variable affecting the desired ultimate properties of the pyrolyzed precursor(s). It may therefore be advantageous to consider incorporating soaking periods at several temperatures as part of the heat treatment. For example, a low temperature soak might be used for curing the precursor(s) prior to a final heating to the pyrolysis temperature. Alternately, the heating rate might be varied to control the extent of the curing prior to pyrolysis.

In the case of carbohydrate precursors, it can be advantageous to precarbonize the carbohydrate prior to pyrolysis at a low temperature. A means for so doing is to

wash the carbohydrate with a strong acid which is subsequently rinsed away.

The aforementioned product has no alkali metal inserted as prepared. Alkali metal atoms, in particular
5 Li, can be inserted thereafter via conventional chemical or electrochemical means (such as in a lithium or lithium ion battery).

Generally, powdered forms of such compounds are used in electrode applications and thus a grinding of the
10 pyrolyzed product is usually required. A variety of embodiments, in particular various battery configurations, are possible using electrode material prepared by the method of the invention. Miniature laboratory batteries employing a lithium metal anode are described in the
15 examples to follow. However, a preferred construction for a lithium ion type product is that depicted for a conventional spiral-wound type battery in the cross-sectional view of Figure 2. A jelly roll 4 is created by spirally winding a cathode foil 1, an anode foil 2, and two micro-
20 porous polyolefin sheets 3 that act as separators.

Cathode foils are prepared by applying a mixture of a suitable powdered (about 10 micron size typically) cathode material, such as a lithiated transition metal oxide, possibly other powdered cathode material if desired, a
25 binder, and a conductive dilutant onto a thin aluminum foil. Typically, the application method first involves dissolving the binder in a suitable liquid carrier. Then, a slurry is prepared using this solution plus the other powdered solid components. The slurry is then coated
30 uniformly onto the substrate foil. Afterwards, the carrier solvent is evaporated away. Often, both sides of the aluminum foil substrate are coated in this manner and subsequently the cathode foil is calendered.

Anode foils are prepared in a like manner except that
35 a powdered (also typically about 10 micron size) carbonaceous insertion compound of the invention is used instead of the cathode material and thin copper foil is usually

used instead of aluminum. Anode foils are typically slightly wider than the cathode foils in order to ensure that anode foil is always opposite cathode foil.

The jelly roll 4 is inserted into a conventional battery can 10. A header 11 and gasket 12 are used to seal the battery 15. The header may include safety devices if desired. A combination safety vent and pressure operated disconnect device may be employed. Figure 2 shows one such combination that is described in detail in Canadian Patent Application No. 2,099,657, Alexander H. Rivers-Bowerman, 'Electrochemical Cell and Method of Manufacturing Same', filed June 25, 1993. Additionally, a positive thermal coefficient device (PTC) may be incorporated into the header to limit the short circuit current capability of the battery. The external surface of the header 11 is used as the positive terminal, while the external surface of the can 10 serves as the negative terminal.

Appropriate cathode tab 6 and anode tab 7 connections are made to connect the internal electrodes to the external terminals. Appropriate insulating pieces 8 and 9 may be inserted to prevent the possibility of internal shorting. Prior to crimping the header 11 to the can 10 in order to seal the battery, electrolyte 5 is added to fill the porous spaces in the jelly roll 4.

Those skilled in the art will understand that the types of and amounts of the component materials must be chosen based on component material properties and the desired performance and safety requirements. The compounds prepared in the examples to follow can have somewhat increased irreversible capacity for lithium along with an increased reversible capacity over that of many typical commercial carbonaceous anode materials. Also, the highest tap density of the example compounds is still somewhat lower than that of typical commercial anode materials. This must be taken into account in the battery design. Generally an electrical conditioning step, involving at least the first recharge of the battery, is part of the

assembly process. Again, the determination of an appropriate conditioning step along with the setting of the battery operating parameters (eg. voltage, current, and temperature limits) would be required of someone familiar with the field.

Other configurations or components are possible for the batteries of the invention (eg. prismatic format). A miniature embodiment, eg. coin cell, is also possible and the general construction of such cells is described in the laboratory coin cell examples to follow.

Without wishing to be bound by theory, adversely or otherwise, the inventors offer the following discussion regarding this type of hard carbonaceous host compound in order to explain how structural characteristics relate to the electrochemical characteristics and therefore what structural characteristics are desirable for electrochemical applications. For overall simplicity, the following discussion pertains to lithium insertion compounds. However, where appropriate, similar comments apply for other alkali metals.

The presence of substantial hydrogen in carbonaceous materials of the prior art prepared by pyrolysis at low temperatures (between 550°C and 750°C) correlates with very high specific capacity but also with large hysteresis between insertion and extraction voltage. These effects may involve a binding of the inserted lithium and the hydrogen.

Hard carbonaceous materials having little hydrogen can still exhibit specific capacities exceeding that of graphite however. The graphene sheets in the precursors for these hard carbonaceous materials are cross-linked and this prevents the ordered stacking of layers in the graphite structure as the precursors are pyrolyzed. When poorly stacked graphene layers are present, it may be possible to adsorb lithium onto the surfaces of each side of the layers. These surfaces are found within the carbon particles, on the atomic scale. In graphite, the layers are

well stacked in a parallel fashion and intercalation of lithium to a composition of LiC_6 is possible (corresponding to about 370 mAh/g and one intercalated layer of lithium per graphene sheet). In materials with poorly stacked layers, unshared lithium layers might possibly be found on each side of the graphene sheets, resulting in compositions up to almost Li_2C_6 (corresponding to about 740 mAh/g). Thus, the number of single layer graphene sheets in the carbonaceous material may be important vis a vis specific capacity.

Information about the average number, N , of stacked graphene sheets in a carbon between serious stacking mistakes can be obtained by x-ray diffraction. This number N , multiplied by the average layer spacing is commonly given the name, L_c . It may therefore be desirable to make carbonaceous materials with N about 1 and with very small L_c (eg. less than about 5\AA). The $\{002\}$ Bragg peak measured in a powder x-ray diffraction experiment is normally used to determine L_c and N . For $N=1$, there is no $\{002\}$ peak since there are no stacked parallel graphene layers to create interferences. (Such a carbon sample might be thought of as having single graphene sheets arranged as in a 'house of cards'.) As N increases (beginning to stack the deck of cards), the $\{002\}$ peak increases in height and decreases in width. Simultaneously, the background on the low angle side of the peak decreases, as N increases. Herein, the empirical parameter R is used for purposes of describing such structures and can be used to distinguish the stacking order in very disorganized materials. Materials having very small R values (about 1) would have N values near 1. Materials having R near 5 would have significantly larger N , possibly with N about 10. Thus, increases in R can be interpreted as increases in the average N in the sample.

The 'house of cards' structure of such disorganized carbons implicitly suggests the presence of significant voids or pores in the structure. The pore number, size,

and shape (particularly of the openings) would be expected to relate to the ability of the single-layer sheets to absorb lithium on both sides and also to have an impact on the electrolyte accessible surface area. For instance, a relatively large number of single-layer sheets implies the existence of a relatively large number of 'pores' between sheets. The preferred pore size is large enough to allow lithium to adsorb on both sides yet not to allow access to non-aqueous electrolyte (a size in the nanometer scale).

Pores can be bottle shaped having neck openings that are small enough to exclude electrolyte from the interior. However, the same pores can still have interiors that are large enough to easily accommodate electrolyte. Samples having numerous such bottle shaped pores can therefore have either relatively large or small surface area depending on how it is measured. For example, if the pore opening is large enough to admit nitrogen but not methylene blue, then nitrogen can be adsorbed on the interior pore surfaces whereas methylene blue cannot. Additionally, minor differences in the size of the pore openings can result in dramatically different electrochemical results. Conceivably, a sample could have enormous internal pore surface area ($>>300 \text{ m}^2/\text{g}$) as determined by BET that is inaccessible to the larger methylene blue molecules. If the effective size of the non-aqueous electrolyte is intermediate to that of nitrogen and methylene blue, such a sample might have either an enormous or a negligible electrolyte accessible surface area depending on minor differences in the size of the pore openings.

A possible means of gradually increasing pore size and openings thereof is by burning off small amounts by heating samples in an oxygen containing atmosphere. (Previous studies on active carbon (J.S. Mattson et al., Activated Carbon, Marcel Dekker Inc. NY, 1971 and F. Rodriguez-Reinoso et al., Chemistry and Physics of Carbon, Vol. 21, Edited by P. A. Thrower, p1) showed that both the sizes and shapes of pores can be manipulated by physical and chemical

activation processes. Note however that most activated carbons are not acceptable host materials for electrochemical lithium insertion because the pore sizes are too large (on the micrometer scale)). Thus, oxidizing may be a means
5 for incrementally increasing both the interior pore surface area and the critical size of pore openings. Some results pertaining to this subject are shown and discussed in the Illustrative Examples to follow.

Small angle x-ray scattering has been widely used for
10 the study of pore structure in carbons (see for example, H. Peterlik et al., Carbon, 32 (1994) p.939). The presence of a substantial number of micropores results in substantial scattering of x-rays at small angle. Thus, carbonaceous hosts of the invention are expected to exhibit such scattering.
15 Conversely, the absence of such scattering is indicative of the absence of micropores (as shown in an Illustrative Example to follow). Note that pores can be closed (ie. no openings) and materials comprising such pores will still show substantial x-ray scattering. Thus,
20 carbonaceous hosts can be imagined that have more pore volume, lower R values, and more small angle scattering, yet less lithium capacity and less irreversible capacity than a comparable host if many pores are closed.

The Guinier theory and formulae (in A. Guinier, Small-angle scattering of X-rays, Wiley and Sons, NY, 1955) can
25 be used to determine pore sizes from the small angle scattering intensity assuming homogeneous spherical pore sizes and randomly located pores. The radius R_p of the pores is related to the radius of gyration, R_g , by:

30
$$R_g = (3/5)^{1/2} R_p$$

The intensity, I_q , at wavevector q is related to the radius
of gyration by:

35
$$I_q \propto NV^2 \exp(-q^2 R_g^2 / 3)$$

where N is the number of pores and V is their volume. This theory therefore predicts a straight line relationship between $\ln(I_q)$ and q^2 . Although the aforementioned assumptions do not generally hold, such a straight line relationship was observed in the case of the following Inventive examples. This suggests that these examples comprise pores of approximately uniform size. Generally speaking, uniform pore sizes are preferred since sizes at the small extreme (ie. in the range of the normal inter-atomic distances) would contribute less to reversible alkali metal capacity, while sizes at the larger extreme (ie. $>30\text{\AA}$) would be more accessible to electrolyte leading to irreversible capacity (as shown in an Illustrative Example to follow).

A. Mabuchi et al., J. Electrochem. Soc., Vol. 142, No.4, April 1995, show radii of gyration values derived from small angle scattering data for mesocarbon microbeads containing substantial hydrogen. The effective pore sizes are relatively very large (R_g of approximately 37\AA and up) and the compounds exhibit significant hysteresis in their voltage curve upon insertion/extraction of lithium.

Background information for the Examples

The following examples are provided to illustrate certain aspects of the invention but should not be construed as limiting in any way.

In general, carbonaceous materials were prepared from hydrocarbon or polymer precursors by pyrolysis under inert gas. Unless otherwise indicated, weighed amounts of the precursors were placed directly in alumina boats and inserted within a stainless steel or quartz furnace tube. The tube was flushed with inert gas for about 30 minutes and then it was inserted into a tube furnace. The furnace and hence the sample temperature was raised to the final pyrolysis temperature and held there for one hour. The heating rate was sometimes deemed to be important, and in

those cases the rate was carefully controlled using a programmable temperature controller.

Powder x-ray diffraction was used to characterize samples using a Seimens D5000 diffractometer equipped with a copper target x-ray tube and a diffracted beam monochromator. The diffractometer operates in the Bragg-Brentano pseudofocussing geometry. The samples were made by filling a 2mm deep well in a stainless steel block with powder and levelling the surface. The incident slits used were selected so that none of the x-ray beam missed the sample in the angular range from 10° to 35° in scattering angle. The slit width was fixed during the measurement. This ensured reproducibility in the measured values of R. (Note: In certain Examples, R was determined slightly differently than mentioned in the preceding. In the Inventive Examples pertaining to Epoxy and Phenolic Resin Precursors, Prior art Examples 1 and 2, and the Illustrative Example re Activated Carbons, the position of the {002} peak was taken to be that of the peak position including the background rather than excluding the background. The effect on the determined values of R is small for all practical purposes and is negligible in the following Examples.)

Where indicated, small angle x-ray scattering data was collected using the preceding diffractometer operating in transmission geometry. Samples were prepared by filling a rectangular frame, having kapton windows, with powder. The prepared samples were about 1.5 mm thick. The incident, antiscatter, and receiving slits were all set to their minimum values of 0.1° , 0.1° , and 0.1 mm respectively. Minimum scattering angles of about 0.5° could be reached with this equipment, which corresponds to a wavevector q of about 0.035\AA^{-1} . The intensity scattered at $2\theta=1^\circ$ was measured and divided by the sample mass to get a relative measure of the number of pores times volume² in the samples. This value was denoted I_1 . R_g was determined using straight

line fits to the small angle scattering data plotted as \ln (intensity) versus q^2 and the aforementioned formula.

Carbon, hydrogen, and nitrogen content was determined on samples using a standard CHN analysis (gas chromatographic analysis after combustion of the samples in air). The weight percents so determined had a standard deviation of $\pm 0.3\%$. In every case, the carbon content was greater than 90% of the sample weight and the hydrogen content was less than 3.3%. The H/C atomic ratio was estimated by taking the ratio of the hydrogen and carbon weight percentages and multiplying by 12 (the mass ratio of carbon to hydrogen). The nitrogen content of all the samples was low and was not always reported. The oxygen content of the samples was not analyzed.

Where indicated, the absorption capacity for methylene blue (MB) was determined using a modification of conventional methods (as in the aforementioned reference Active Carbon). Samples were dried prior to testing at 130°C . In most of the following Examples, about 0.1 grams of sample was placed in a flask along with 1-2 ml of 0.2% surfactant solution (prepared using Micro-Liquid Laboratory Cleaner (trademark), a standard laboratory detergent) plus about 5 ml of deionized water. A titration was then performed using a 1.5 g/L titrating solution of hydrated MB in discrete steps. An initial amount of solution was added followed by 5 minutes of vigorous shaking. (The initial amount was either a minimum 0.1 ml or 1.0 ml depending on the estimated adsorption capacity of the sample.) The resulting mixture was then visually compared to a 0.4 mg/L reference solution of MB. If the mixture was clearer than the reference, another 1.0 ml of titrating solution was added and the steps repeated. If the mixture was not clearer than the reference, adsorption was allowed to continue for a maximum of 3 days. If the mixture again became clearer than the reference, the discrete titrating continued. Otherwise, the measurement was finished and the adsorption capacity was taken to be that amount of MB

titrated just before the last stepwise addition. For the samples tested, generally the titrated MB was adsorbed in the 5 minute interval periods with the exception of the last few stepwise additions. In the Carbohydrate Precursor Examples and the Illustrative Examples re burnoff and small angle scattering, the procedure was the same except that a 1mM methylene blue titrating solution was used and the stepwise additions were not of constant magnitude.

Initially, conventional BET methods were tried in order to determine the surface area of some hard carbon products based on the adsorption of nitrogen. The surface area could not be determined reliably in this way however. During analysis, adsorption continued slowly over long periods of time (hours). It seemed that the samples had substantial surface area that was difficult, but possible, to access with nitrogen. Thus, the reliability of adsorption values was considered questionable using conventional BET methods. Instead, a modified procedure was employed. Herein, single point BET surface area measurements were made using a Micromeritics Flowsorb 2300 surface area analyzer. Carbon samples were outgassed under inert gas for several hours at 140°C before each measurement. The adsorption of nitrogen (from a 30% nitrogen in helium mixture) at 77°K on the samples was allowed to proceed for several hours. Adsorption was considered complete when the thermal conductivities of the gas stream before and after the sample were equal, indicating identical gas compositions. The amount of N₂ adsorbed was determined by that which desorbed when the sample temperature was increased to room temperature. Two measurements were made for each sample and the results reported represent the average of the two desorptions. The measurements usually can be duplicated satisfactorily with an accuracy within ±3%. Standard methods were then used to calculate the specific surface area of the sample accessible to N₂ molecules.

Where indicated, tap densities were measured using a Quantachrome Dual Autotap device. Samples were placed in

a 10 ml graduated cylinder and subjected to 500 standard taps.

Laboratory coin cell batteries were used to determine electrochemical characteristics of the samples including specific capacity for lithium. These were assembled using conventional 2325 hardware and with assembly taking place in an argon filled glove box as described in J.R. Dahn et al, *Electrochimica Acta*, 38, 1179 (1993). Figure 3 shows an exploded view of the coin cell type battery. For purposes of analysis, the samples were used as cathodes in these batteries opposite a lithium metal anode. A stainless steel cap 21 and special oxidation resistant case 30 comprise the container and also serve as negative and positive terminals respectively. A gasket 22 is used as a seal and also serves to separate the two terminals. Mechanical pressure is applied to the stack comprising lithium anode 25, separator 26, and sample cathode 27 by means of mild steel disc spring 23 and stainless disc 24. The disc spring was selected such that a pressure of about 15 bar was applied following closure of the battery. 125 μ m thick metal foil was used as the lithium anode 25. Celgard® 2502 microporous polypropylene film was used as the separator 26. The electrolyte 28 was a solution of 1M LiPF₆ salt dissolved in a solvent mixture of ethylene carbonate and diethyl carbonate in a volume ratio of 30/70.

Sample cathodes 27 were made using a mixture of powdered sample compound plus Super S (trademark of Ensagri) carbon black conductive dilutant and polyvinylidene fluoride (PVDF) binder (both in amounts of about 5% by weight to that of the sample) uniformly coated on thin copper foil. The powdered sample and the carbon black were initially added to a solution of 20% PVDF in N-methylpyrrolidinone (NMP) to form a slurry such that 5% of the final electrode mass would be PVDF. Excess NMP was then added until the slurry reached a smooth syrupy viscosity. The slurry was then spread on small preweighed pieces of Cu foil (about 1.5 cm² in area) using a spreader, and the

NMP was evaporated off at about 90°C in air. Once the sample cathode stock was dried, it was compressed between flat plates at about 25 bar pressure. These electrodes were then weighed and the weight of the foil, the PVDF, and the carbon black were subtracted to obtain the active electrode mass. Typical electrodes were 100 micrometers thick and had an active mass of 15 mg.

After construction, the coin cell batteries were removed from the glove box, thermostatted at $30 \pm 1^\circ\text{C}$, and then charged and discharged using constant current cyclers with $\pm 1\%$ current stability. Data was logged whenever the cell voltage changed by more than 0.005 V. Unless otherwise indicated, currents were adjusted to be 18.5 mA/g of active material for the initial two cycles of the battery. Much of the discharge capacity of the example carbons is very close to the potential of lithium metal. Thus, special testing methods were required to determine the full reversible capacity. Coin cell batteries were therefore discharged at constant current for a fixed time, the time being chosen such that the battery voltage would fall below zero volts (versus Li) and such that lithium plating on the carbon electrode would occur. Note that the plating of lithium does not occur immediately after the battery voltage goes below zero volts due to the overvoltage caused by the finite constant current used. However, plating does begin shortly thereafter (usually around -0.02V) and is characterized by a region where the voltage of the battery rises slightly once plating is initiated followed by a constant or nearly constant voltage region. The onset of lithium plating is clearly and easily determined as shown in the following examples. The plating of lithium on the carbon electrode was continued for a few hours and then the current was reversed. First, the plated lithium is stripped, and then inserted lithium is removed from the carbon. The two processes are easily distinguished provided that the charge rates are small (ie. less than 37 mA/g of active material). The reversible capacity was

calculated as being the average of the second discharge and second charge capacities of the battery, excluding lithium plating and stripping. The first discharge capacity was not used for this calculation because irreversible processes occur on the first discharge.

Illustrative Examples re prior art

Prior art Example 1.

Several samples were made by preparing a thermoset polymer from furfuryl alcohol in the presence of either phosphoric, oxalic, or boric acid followed by pyrolysis at various temperatures up to 1100°C according to the methods of the aforementioned A. Omaru reference. R values for all these samples were determined as mentioned above and the results are listed in Table 1.

Table 1 Data for the samples of Prior Art Example 1.

Precursor	Polymerizing Acid	Pyrolysis temperature (°C)	R
Polyfurfuryl Alcohol	Phosphoric	600	2.30
Polyfurfuryl Alcohol	Phosphoric	1100	2.45
Polyfurfuryl Alcohol	Oxalic	900	2.56
Polyfurfuryl Alcohol	Phosphoric	1000	2.74
Polyfurfuryl Alcohol	Boric	900	4.9

The high capacity, hard carbon samples of the prior art appear to have R values that exceed 2.2.

Prior art Example 2

KSRW grade (trademark) petroleum pitch was obtained from Kureha Company of Japan in order to replicate the prior art material of Mabuchi et al. A series of soft carbon samples was made by pyrolysing said pitch at temperatures between 550°C and 950°C. The H/C atomic ratios for this series was determined as mentioned above and are shown in Figure 4 (also shown are H/C ratios for Inventive Example samples derived from epoxy precursors to follow). The x-ray diffraction pattern in the vicinity of the {002} peak is shown in Figure 5 for some of these samples along with the pattern of the precursor itself. (Note that the patterns have been offset vertically by 2000 counts for clarity.) R values and H/C data for this series are presented in Table 2. None of the samples have both $R < 2.2$ and $H/C < 0.1$.

Table 2 Data for the samples of Prior Art Example 2.

Pyrolysis Temperature (°C)	H/C	R
550	0.38	2.67
600	0.235	2.14
700	0.183	2.33
900	0.080	3.33

Laboratory coin cell batteries were prepared using some of these samples as described previously. Figure 6b shows the voltage versus capacity plot for the second cycle of these batteries. (The plots have been shifted upwards sequentially by 0.05 V for clarity in Figure 6b.) Figure 6a shows an expanded version of Figure 6b near 0 volts to better indicate the onset of lithium plating and completion

of lithium stripping (indicated by arrows for the 550°C data) during cycling. (The data have been shifted upwards sequentially by 0.1 V for clarity in Figure 6a.)

Each of the samples pyrolyzed at 700°C or less show a maximum specific capacity (calculated as described previously) of about 650 mAh/g. Samples pyrolyzed above 700°C had significantly less capacity (down to about 400 mAh/g for the sample pyrolyzed at 900°C). Substantial hysteresis in the voltage plots can be seen, especially for samples pyrolyzed at the lower temperatures.

The very high capacity carbon samples of the prior art appear to lose their very high capacity characteristics when pyrolyzed at temperatures above about 700°C. There seems to be a correlation between larger specific capacity and larger H/C ratio for these samples.

Illustrative Example re activated carbons

M20E and M30 (trademarks) grade activated carbons were obtained from Spectracorp, MA, U.S.A.. Some of each activated carbon sample was analyzed as is and some was pyrolyzed at 1000°C prior to analysis. Additionally, polyvinylidene fluoride (PVDF, obtained from Aldrich Chemical company, U.S.A.) was pyrolyzed at 1000°C. R, H/C, CHN, and specific capacity values were obtained as described in the preceding for each of these samples. For each activated carbon sample, R was about 1.1 and the H/C atomic ratio was very small (<0.03). Figure 7 shows the x-ray diffraction pattern in the vicinity of the {002} peak for the M20E sample as received and after pyrolysis to 1000°C. For the pyrolyzed PVDF sample, R was about 1.3 and the H/C atomic ratio was 0.053.

The conventional BET surface areas for all these samples are relatively high (>100 m²/g). Also, the adsorption capacity for MB is also relatively high. For M20E and M30 activated carbons as supplied, the MB adsorption capacity exceeded 400 micromoles/g. (It was

deemed to be unnecessary to continue the titration.) The pyrolyzed PVDF carbon sample adsorbed about 200 micromoles of MB per gram.

5 All samples exhibited high specific capacities but also substantial hysteresis in the voltage plot and substantial irreversible capacity on the first discharge. For instance, Figure 8 shows the second cycle voltage versus capacity plot for the battery containing M30 activated carbon pyrolyzed at 1000°C. The specific capacity is about 10 550 mAh/g and there is substantial hysteresis. Figure 9 shows the first cycle voltage versus capacity plot for the same battery containing M30 activated carbon pyrolyzed at 1000°C. The first discharge capacity is enormous at about 2000 mAh/g and thus there is substantial irreversible 15 capacity.

This example shows that some hard carbons, derived from precursors other than those of the invention, when pyrolyzed at temperatures above 700°C can have $R < 2.2$ and $H/C < 0.1$ and yet not provide the low hysteresis and irreversible capacity advantages of the invention. Such hard 20 carbons have high BET surface areas and also have relatively high adsorption capacities for MB (> 4 micromoles/g carbon).

25 Inventive Examples

Epoxy Precursors:

Epoxy Example 1

30

A series of samples was prepared using Dow 438 (trade-mark of Dow Chemical Co., U.S.A.) epoxy novolac resin as a precursor. The resin was usually mixed with different amounts of phthallic anhydride hardener which was cured at 35 about 120°C to a hard plastic state prior to pyrolysis. Pyrolysis was performed at temperatures varying from 700°C to 1100°C. Afterwards, R, H/C, CHN, and specific capacity

values were obtained for most samples in the series as described in the preceding. Currents were adjusted to be either 7.4 mA/g, 18.5 mA/g, or 37mA/g of active material, depending on the desired test. Conventional BET
5 and MB adsorption capacities were also obtained for some representative samples in the series. A summary of samples prepared with these corresponding values is shown in Table 3.

1000
900
800
700
600
500
400
300
200
100
0
0.000 0.005 0.010 0.015 0.020 0.025 0.030 0.035 0.040 0.045 0.050 0.055 0.060 0.065 0.070 0.075 0.080 0.085 0.090 0.095 1.000

Table 3. Data for the samples of Epoxy Example 1

No.	Heating Rate (°C/min)	Pyrolysis Temperature (°C)	Weight % hardener	Weight % C	Weight % H	Weight % N	H/C	BET (m ² /g)	MB (μmoles per g)	R	Specific Capacity (mAh/g)
I	20	700	23	93.3	1.3	<0.1	0.17	NA	NA	1.39	650
II	20	800	23	91.7	0.85	<0.1	0.11	NA	<4	1.43	610
III	20	900	23	93.4	0.52	<0.1	0.067	NA	NA	1.47	590
IV	20	1000	23	95.2	0.50	0.2	0.063	NA	NA	1.59	NA
V	1	1000	0	95.4	0.26	0.5	0.033	>152	<4	2.10	475
VI	1	1000	15	95.4	0.69	0.5	0.087	NA	NA	2.32	455, 430
VII	10	1000	38	93.1	0.23	0.6	0.030	>217	<4	1.42	570
VIII	1	1000	15	95.8	0.41	0.4	0.051	NA	<4	1.90	430, 440
IX	5	1100	15	97.3	0.20	0.2	0.025	NA	NA	2.92	280

(If two batteries were tested for specific capacity, both values are given.)

The voltage versus capacity plots for sample no. I pyrolyzed at 700°C is compared to that of the pitch sample of Prior Art Example 2 pyrolyzed at the same temperature in Figure 10. These two plots show almost identical behaviour (although the battery using sample no. I was allowed to plate more lithium). Figure 4 indicates that the two samples in Figure 10 have almost the same H/C ratio. Figure 11 shows the x-ray diffraction patterns of samples no. I, II, and III (offset by 1600 counts). Therein, it can be seen that sample no. I has a substantially smaller R than the corresponding pitch sample in Figure 5. There are very few stacked graphene layers in sample no. I as evidenced by the {002} peak amounting to only a shoulder on the low angle background. Figures 11 and 5 also show that these structural differences persist at higher pyrolysis temperatures.

Figures 12a and b show the voltage versus capacity plots for samples no. I, II, III, and V (plots are offset by 0.05 and 0.1 volts in Figures a and b respectively). These samples all have $R < 2.2$. Sample I shows considerable hysteresis in the voltage plot. At higher pyrolysis temperatures, the capacity available near 1.0 V during the charge of sample no. I is shifted down to near 0 V, so that around 900°C to 1000°C reversible cycling with little hysteresis is obtained. Furthermore, high specific capacity is maintained in samples no. III and V at pyrolysis temperatures of 900°C to 1000°C, unlike that of the pyrolyzed pitch of Prior Art Example 2.

Figures 13a and b show the voltage versus capacity plots for samples no. V, VI, VII, and IX (plots are offset by 0.05 and 0.1 volts in Figures a and b respectively). These Figures also illustrate the relation between R and specific capacity for samples pyrolyzed at 1000°C to 1100°C. As R increases, the specific capacity decreases. Figure 14 shows the x-ray diffraction patterns in the vicinity of the {002} peak for the samples of Figures 13a and b. (The patterns have been offset upwards sequentially

by 3000 counts for clarity.) Figure 15 is provided to show a summary plot of specific capacity versus R for samples III to IX inclusive which were all pyrolyzed between 900°C and 1100°C. The samples therein all exhibited voltage curves with little hysteresis and all had H/C<0.1. Again, as R increases, the specific capacity decreases.

Figure 16 shows the first discharge and charge of the laboratory coin cell battery employing sample no. VII. The battery shows a first discharge capacity of about 625 mAh/g and a first recharge capacity of about 465 mAh/g. The irreversible capacity of sample VII is therefore only about 160 mAh/g, which is considered to be in an acceptable range for practical lithium ion batteries. The surface area measured by the conventional BET method for sample VII was 217 m²/g. If this area were all accessible to electrolyte, such low values for the irreversible capacity would not be expected (for example, based on the disclosure of U.S. Patent No. 5,028,500). However, the MB adsorption capacity is relatively low (<5 micromoles/g) for this and all the other inventive samples tested.

Insertion compounds of the invention can therefore have very high specific capacity coupled with acceptable associated hysteresis in voltage and acceptable associated irreversible capacity.

Epoxy Example 2

A sample was prepared using Dow D.E.R. 667 (trademark of Dow Chemical Co., U.S.A.) bisphenol A type epoxy resin as a precursor. No hardener was used in this preparation. Pyrolysis was performed by heating first at 250°C for 2 hours followed by ramping at 30°C/min to 800°C and thereafter holding for 2 hours. R for this sample was about 1.52. Laboratory coin cell batteries were then prepared and specific capacity values were obtained.

The voltage versus capacity plot for one of these batteries is shown in Figures 17a and b (plots are offset

by 0.05 and 0.1 volts in Figures a and b respectively). Therein, the specific capacity was 410mAh/g. The irreversible capacity is only about 160 mAh/g and the hysteresis in the voltage is considered acceptable.

- 5 It thus appears possible to make insertion compounds of the invention using bisphenol A type epoxy resin.

Phenolic Resin Precursors:

10 Phenolic Resin Example 1

A series of samples was prepared using three different phenolic resins as a precursor. Two are base-catalysed or resole types and one is an acid catalyzed or novolac type.

- 15 The three different precursors used were:

- A) resole type, product # 11760 of Plenco, Plastics Engineering Company, Sheboygan, WI, 53082-0758 U.S.A.;
B) resole type, product # 29217 of Oxychem, Occidental Chemical Corp, Durez Engineering Materials, 5005 LBJ freeway, Dallas, Texas 75244, U.S.A.; and
20 C) novolac type, product # 12116 of Plenco, supra.

- The phenolic resin precursors were all supplied in powder form. In each case, the powder was cured at from
25 about 150°C to 160°C for 30 minutes prior to pyrolysis. At the end of the curing step, a solid lump was obtained. The lump was next reduced to powder in an autogrinder. The powdered cured resin was then pyrolyzed in a tube furnace under flowing argon. The samples were ramped from room
30 temperature to the desired pyrolysis temperature over 3 hours and held there for 1 hour. The furnace power was then turned off and the samples were cooled to near room temperature within the furnace tube under flowing argon. Cooling took several hours.

- 35 Pyrolysis was performed at temperatures varying from 700°C to 1100°C. Afterwards, the samples were ground into a powder. R, H/C (by CHN analysis), and specific capacity

values (by coin cell battery tests) were obtained for most samples in the series as described in the preceding. The MB adsorption capacity was also obtained for sample B1000 and was found to be about 1.6 micromoles per gram of host.

- 5 Yield was determined from the weights of the samples before and after pyrolysis. The results of these measurements is given in Table 4. (Two batteries of each sample were made and the results from each experiment were within 20 mAh/g. The values given in Table 4 represent the
- 10 average values obtained.)

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211

Table 4. Data for the samples of Phenolic Resin Example 1

Sample ID	Pyrolysis Temp. (°C)	Weight % C	Weight % H	Weight % N	H/C	Yield (%)	R	Reversible Capacity (mAh/g) (±20)	Irreversible Capacity (mAh/g) (±20)
A700	700	91.2	1.5	1.2	0.19	57	1.37	500	440
A800	800	93.1	1.0	1.3	0.13	55	1.56	510	280
A900	900	92.3	0.6	1.2	0.07	55	1.63	510	210
A1000	1000	94.2	0.4	1.9	0.05	54	1.68	450	160
A1100	1100	96.7	0.3	0.8	0.04	52	1.79	330	70
B700	700	94.7	1.8	0.4	0.22	58	1.33	630	260
B800	800	95.8	0.9	0.7	0.11	57	1.39	540	210
B900	900	94.8	0.5	0.5	0.06	57	1.32	410	300
B1000	1000	95.6	0.3	0.6	0.04	56	1.34	560	200
B1100	1100	97.4	0.4	1.4	0.05	56	1.64	340	110
C800	800	95.7	0.9	0.6	0.11	64	1.53	530	210
C900	900	95.1	0.4	0.7	0.05	57	1.63	450	180
C1000	1000	96.5	0.3	0.8	0.04	58	1.54	450	130
C1100	1100	97.0	0.3	1.3	0.03	56	1.64	330	120

Figure 18a shows the first discharge-charge cycle for the series of pyrolyzed A type precursors. The samples heated at 700°C and 800°C show significant hysteresis in the voltage profile (Li is inserted near 0V but is removed near 1.0V). This has been ascribed to the large hydrogen content in the samples. Upon heating to 900°C, the hysteresis is predominantly eliminated and the samples show substantial capacity at low voltage. Figure 18b shows the second cycle of the same series. The vertical lines indicate the onset of lithium plating during discharge and the termination of lithium stripping during charge. The batteries prepared from material heated to 900°C and 1000°C appear most promising for this series. Their reversible capacities are about 510 and 450 mAh/g respectively.

Figures 19a and 19b show the first and second cycle voltage profiles for the series of pyrolyzed B type precursors. The sample made at 1000°C gives a reversible capacity of about 560 mAh/g and an irreversible capacity of only about 200 mAh/g. This is a very attractive material for use as a lithium ion battery anode. Figures 20a and 20b show the first and second cycle voltage profiles for the series of pyrolyzed C type precursors. The samples made at 900°C and 1000°C give reversible capacities near 450 mAh/g. The latter has an irreversible capacity of only 130 mAh/g.

Extended cycling was carried out on a battery comprising sample B1000 at currents of 37mA/g of active material. Figure 21 shows the capacity versus cycle number for this battery. There is little capacity loss upon cycling.

Insertion compounds of the invention can therefore have high reversible specific capacity coupled with acceptable associated hysteresis in voltage and acceptable associated irreversible capacity.

Phenolic Resin Example 2

The series of samples made from the B type precursor were shown to have the highest reversible capacities in the preceding Example. In order to determine how the reversible and irreversible capacities varied in the narrower temperature range between 900°C and 1100°C, an additional series of samples using this precursor was prepared. The samples were tested in coin cell batteries as described earlier and voltage profiles, irreversible capacities, and reversible capacities were measured. Two batteries of each were made and the results from each experiment were within 20 mAh/g.

Table 5 summarizes the average specific capacity results for all the samples prepared from the B type precursor. Figure 7 shows representative second cycle voltage profiles for the batteries made with these samples.

Table 5. Data for the samples of Phenolic Resin Examples

Sample ID	Reversible Capacity (mAh/g) (± 20)	Irreversible Capacity (mAh/g) (± 20)
B900	410	300
B940	470	160
B970	550	160
B1000	560	200
B1030	540	140
B1060	450	200
B1100	340	110

Appropriate selection of the pyrolysis temperature appears to be important in order to optimize the properties of these insertion compounds.

5 Carbohydrate and carbohydrate containing precursors:

Carbonaceous hosts of the invention were prepared using a variety of carbohydrate precursors. Table 6 lists the precursors used, along with their source and morphology.

Table 6. List of carbohydrate precursors

Carbohydrate Material	Supplier	Morphology
Table Sugar (sucrose)	Canada Safeway	Powder
Sucrose	BDH Inc. (Toronto), Reagent grade	Powder
Starch	BDH Inc. (Toronto) Reagent grade	Powder
Walnut Shells	Canada Safeway	Small pieces of shell separated from the nut
Filbert Shells	Canada Safeway	Small pieces of shell separated from the nut
Almond Shells	Canada Safeway	Small pieces of shell separated from the nut
Red Oak	Reimer Hardwoods (Abbotsford, B.C.)	1 cm ³ chunks cut from furniture-grade lumber
Maple	Reimer Hardwoods (Abbotsford, B.C.)	1 cm ³ chunks cut from furniture-grade lumber

Precursors (typically batches between 1 and 25 grams) were contained in nickel foil boats and placed within a stainless steel or quartz furnace tube. Prior to heating, the tube was flushed with argon (Ultra High Purity Grade - Linde) for 30 minutes to remove air. The samples were heated from room temperature to a desired pyrolysis temperature at a rate of 25°C/min. They were held at the pyrolysis temperature for 1 hour. The furnace power was then turned off and the samples were cooled to near room temperature within the furnace tube under flowing argon (a process which took several hours). The samples were weighed before and after pyrolysis, so that the yield could be determined. Certain samples were pyrolyzed at temperatures of 1200°C and higher. These samples were first pyrolyzed to 1100°C as in the preceding. Thereafter, pyrolysis was continued in a similar manner using a Centorr Series 10 furnace.

Some samples of table sugar (hereinafter denoted simply as 'sugar') were precarbonized by washing in excess concentrated sulfuric acid. About 50 grams of sugar was first mixed with about 100 cc of concentrated sulfuric acid, added slowly. The resulting char was briefly crushed, washed with boiling water, and filtered to recover the solids. Rinsing was repeated until the filtrate gave the same pH (about 6) as the tap water used for rinsing. The product was dried overnight at 110°C overnight before pyrolysis. The carbon yield was calculated for these samples by the final carbon mass divided by the initial weight of sugar. These samples are denoted as 'a-sugar' samples.

The pyrolyzed samples were ground to powder and analyzed as described in the preceding. Results of these measurements are tabulated in Table 7.

Table 1. Summary of characteristics of pyrolyzed carbohydrate precursors

No.	Precursor	Pyrolysis Temp. (°C)	Yield %	C wt. %	H wt. %	N wt. %	H/C atomic	R _g	R _s (Å)	I _T (counts per mg)	Density (g/cc)	MB (μmoles per g)	Surface area (m ² /g)	Reversible Capacity** (±20 mAh/g)	Irreversible Capacity** (±20 mAh/g)
1	sugar	1100	12*	97.3	0.28	0.96	0.034	1.91	5.49	19.3	0.69	-	15	537, 534	130, 141
2	sucrose	1000	8*	96.9	0.42	0.67	0.05	1.96	5.32	16.7	0.91	<2.9	31	529, 534	138, 137
3	sugar	1000	11*	97	0.51	0.72	0.063	1.95	5.49	18.4	-	-	220	442, 363	205, 222
4	sugar	900	12*	95.5	0.59	0.39	0.074	1.75	4.82	11.9	0.78	-	58	590, 557	175, 184
5	sugar	800	17*	95.2	0.94	0.27	0.12	1.76	4.74	10	0.8	-	120	624, 623	197, 212
6	sugar	700	12*	93.8	1.41	0.21	0.18	1.58	4	13.3	0.62	-	250	690, 740	274, 266
7	sugar	600	14*	92.5	2.28	0.1	0.3	1.46	3.13	6.8	0.67	-	460	764, 790	455, 313
8	a-sugar	1100	27	97.2	-	0.25	-	1.63	5.01	15.8	-	<1.5	1.8	564, 567	34, 75
9	a-sugar	1000	30	97	0.49	0.36	0.061	1.78	5.27	16.2	-	-	180	477, 460	130, 147
10	a-sugar	900	29	95.4	0.55	0.42	0.069	1.69	4.8	11.3	-	-	68	591, 605	182, 188
11	a-sugar	800	29	94.3	0.93	0.28	0.12	1.64	4.71	10.5	-	-	490	577, 566	225, 220
12	a-sugar	700	30	91.4	1.51	0.26	0.2	1.47	4.37	8.6	-	-	430	577, 575	375, 378
13	a-sugar	600	30	92.9	2.41	0.21	0.31	1.3	3.08	6.5	-	-	370	665, 706	521, 466
14	starch	1000	11	91.7	0.52	0.84	0.068	1.88	5.7	23.2	0.76	<2.5	30	493, 496	196, 199
15	filbert	1000	23	-	-	-	-	1.92	5.72	22.7	0.63	-	180	412, 400	183, 198
16	walnut	1000	23	-	-	-	-	1.85	5.97	16	0.63	-	60	490, 490	157, 126
17	almond	1000	23	-	-	-	-	2	5.93	17	0.6	-	46	395, 371	167, 185
18	oak	1000	18	-	-	-	-	1.85	5.53	19.1	0.54	<3.5	13	518, 515	145, 159
19	maple	1000	18	-	-	-	-	1.98	5.58	28.2	0.56	-	63	497, 503	140, 127
20	maple	1100	18	-	-	-	-	1.86	5.54	20.0	0.56	-	11	547, 524	- , 104
21	sugar	1200	11*	-	-	-	-	1.98	5.66	22.5	0.60	-	5.5	374, 379	71, 59
22	sugar	1400	11*	-	-	-	-	2.37	6.08	31.5	0.63	-	7.9	284, 296	35, 38
23	sugar	1600	11*	-	-	-	-	3.09	6.53	46.7	0.58	-	6.3	208, 210	31, 34
24	a-sugar	1200	28	-	-	-	-	1.83	5.78	17.3	0.77	-	1.3	367, 368	38, 45
25	a-sugar	1400	28	-	-	-	-	2.02	5.95	21.8	0.76	-	1.2	280, 274	25, 25
26	a-sugar	1600	28	-	-	-	-	2.48	6.46	33.2	0.73	-	1.2	198, 202	24, 25
27	starch	1100	11	-	-	-	-	1.88	5.59	29.6	0.71	-	4.9	523, 526	154, 150
28	starch	1200	10	-	-	-	-	2.13	6.06	42.6	0.65	-	3.1	337, 389	58, 54
29	starch	1400	10	-	-	-	-	2.40	6.21	42.8	0.58	-	3.8	277, 286	32, 30
30	starch	1600	10	-	-	-	-	2.89	6.66	65.4	0.55	-	3.3	212, 207	35, 32
31	oak	1100	19	-	-	-	-	1.78	5.47	19.5	0.59	-	12.1	587, 538	115, 120
32	oak	1200	18	-	-	-	-	2.02	5.94	30.9	0.55	-	4.8	334, 330	38, 60
33	oak	1400	18	-	-	-	-	2.26	6.11	35.5	0.55	-	4.7	261, 270	33, 35
34	oak	1600	18	-	-	-	-	2.66	6.58	46.8	0.53	-	4.6	192, 193	30, 29

* - The yield for these samples was difficult to estimate due to boiling of the samples with associated expansion outside the sample boat.

** - The capacities for both (2) batteries tested are reported.

Yields near 20% were readily achieved using this simple pyrolysis method. The H/C ratio was less than 0.1 for heating temperatures above 800°C. Tap densities up to 0.9 g/cc were obtained.

Figure 23 shows the powder x-ray diffraction profiles of some pyrolyzed sucrose samples (numbers 1, 2 (BDH source), 4, 5, 6, and 7) as a function of pyrolysis temperature. The {002} Bragg peak near 22° is poorly formed in all these samples, indicating materials made up predominantly of single carbon layers arranged somewhat like a 'house of cards'. The {100} and {110} Bragg peaks near 44° and 80° respectively can be used to estimate the lateral extent of the graphene sheets (this is the distance over which the sheets are more or less flat). The lateral dimension ranges from near 10Å for the sample pyrolyzed at 600°C to near 25Å for the sample pyrolyzed at 1100°C. The diffraction patterns for the samples made from acid-washed sugar (numbers 8-13) show similar features.

Figure 24 shows the x-ray diffraction profiles for the samples pyrolyzed at 1000°C from starch and cellulose precursors. The patterns shown are for samples number 18, 17, 16, 15, and 14 from top to bottom in Figure 24. These patterns resemble one another and additionally resemble the pattern of sample number 2 in Figure 23, suggesting similar structural arrangements.

Higher pyrolysis temperature tends to produce smaller BET surface area. (However, samples number 3 and 9 have anomalously high surface areas.) During pyrolysis, the samples emit water, CO₂, and other gases. If the argon flow rate is too small, these gases remain in the tube and oxidize the samples leading to high surface areas.

Laboratory coin cell batteries were constructed using these pyrolyzed samples as described in the preceding. Figures 25a and b show the voltage versus capacity plots for the second cycle for representative batteries comprising samples number 8, 2, 10, 11, and 12 prepared between

700°C and 1100°C. Samples number 8, 2, and 10 show large reversible capacities and little voltage hysteresis. (Materials prepared at 800°C and below can contain substantial hydrogen leading to significant hysteresis in the voltage plateaus. Nevertheless, such carbons, if prepared cheaply enough, might be useful for some battery applications.)

From the data in Table 7, irreversible capacities are seen to decrease as the pyrolysis temperature increases. Samples number 3 and 9 have significantly less reversible capacity than does sample 2, prepared at the same temperature. This might be attributed to differences in the samples as evidenced by the larger surface area of samples 3 and 9 compared to sample 2.

Figures 26a and b show the voltage versus capacity plots for the second cycle for representative batteries made with sucrose, cellulose, and starch precursors pyrolyzed at 1000°C. Data is shown for sample number 2 (for comparison), 18 (oak), 14 (starch), 16 (walnut shells) and 15 (filbert shells). Samples 2, 18, and 14 show excellent behavior, and it is likely that the performance of the other samples could be improved through changes to the pyrolysis process. Thus, pyrolyzed products made from oak, starch, and walnut shells gave similar behavior to that made from sucrose.

Some of the batteries underwent extended cycling as described in the preceding. Discharge and charge currents of 74 mA/g and 37 mA/g respectively were used for the extended cycle testing between 2.0V and the onset of lithium plating. Figures 27, 28, and 29 show the capacity versus cycle number for batteries containing electrodes of samples 8, 14, and 18 respectively. These batteries show little capacity loss upon cycling and retain cycling capacities near 500 mAh/g. The battery containing sample 14 (Figure 28) shows the poorest performance. This may be due to the large impurity content in the sample (as per Table 7, this sample is only 91.7% carbon by weight).

Thus, carbohydrates in general can be used to prepare insertion compounds having excellent electrochemical characteristics by pyrolyzing at temperatures between about 800°C and about 1200°C. Some differences were noticed between the samples prepared from different carbohydrate precursors, but these may be due in part to the differing amounts of impurities in the naturally occurring sources. For example, the wood and shell samples comprise significant, varied amounts of lignin and/or oil.

Comparative Example

For purposes of comparison, the characteristics of sample number VII from Epoxy Resin Example 1 and sample B1000 from Phenolic Resin Example 1 are reported in Table 8 below.

Table 8. Characteristics of Comparative Examples

Sample Number	H/C	R	R _g	I ₁ (counts per mg)	MB (μmoles per g)	Surface area (m ² /g)	Reversible Capacity (mAh/g)	Irreversible Capacity (mAh/g)
VII (epoxy)	0.03	1.58	5.7*	14*	<4	217	570	150
B1000 (phenolic resin)	0.04	1.37	5.5	10	-	235	560	200

* Obtained from another sample similar to VII.

Voltage curves of cycles 5 and 6 of the batteries comprising carbohydrate precursor sample 8 and phenolic resin precursor sample B1000 are shown in Figure 30. (The B1000 sample was discharged and charged at 37 mA/g.) The

curves are similar. Figure 31 compares the differential capacity, measured during the 5th cycle charging, of the two batteries of Figure 30. Within error, these are identical.

- 5 The insertion compounds prepared from pyrolyzed epoxy resins, phenolic resins, and/or carbohydrates can have the same physical and electrochemical characteristics.

Illustrative Examples re Burnoff

10

A first amount of DEN 438 epoxy novolac resin (from DOW Chemical) was cured with 20 weight % 4-aminobenzoic acid at 170°C and pyrolyzed at 1000°C to produce carbonaceous material similar to sample number VII of the Epoxy Examples. Samples (about 1 gram each) were then oxidized to varying degrees in a furnace tube under a flow of extra dry air. This was accomplished by heating the samples at a rate of 10°C/minute to different specific maximum temperatures (T_{max}). The amount of carbon burned off was obtained by calculating the difference between the initial and final mass (accurate to $\pm 0.1\%$).

Figure 32 shows the x-ray diffraction patterns of three of the preceding oxidized samples with varying weight % burned off. The intensity of the diffraction peaks decreases with % burnoff while the intensity at small scattering angles increases with % burnoff. The diffraction peaks may be expected to decrease as the number of x-ray scatterers decreases. The increase in intensity at small angles is consistent with an increase in porosity of the sample. The \ln (intensity) versus q^2 relationship was roughly linear in each case, and the derived values of R_g also suggest a small increase in pore size with % burnoff.

A second amount of DEN 438 epoxy novolac resin (from DOW Chemical) was cured with 20 weight % phthalic anhydride at 170°C and then pyrolyzed at 1000°C to produce carbonaceous material similar to sample number VII of the Epoxy Examples. Samples (about 1 gram each) were then oxidized

to varying degrees in a furnace tube under a flow of extra dry air. This was accomplished by heating the samples at a rate of 10°C/minute to different specific maximum temperatures (T_{\max}). The amount of carbon burned off was obtained by calculating the difference between the initial and final mass (accurate to $\pm 0.1\%$). Physical and electrochemical characteristics were determined as in the preceding Inventive Examples. Table 9 shows a summary of the values obtained. (The specific reversible and irreversible capacities represent the average value determined from two test batteries.)

This second set of pyrolyzed samples was then reheated at 1000°C under argon to remove surface oxides. The weight loss after this reheating is also shown in Table 9. Where indicated, the specific capacities of the reheated samples were also determined.

The surface area as determined by BET increased markedly with burnoffs of only a few weight %. Also, there were significant differences noticed in the nitrogen adsorption kinetics. It took progressively less time for samples to fully adsorb nitrogen (from about 4 hours for sample I-1 down to less than 1 hour for sample I-8). By contrast, the MB absorption values did not increase significantly until after about 5% by weight was burned off. As pore openings enlarge or as new openings are created, the rate and total amount of nitrogen adsorbed may be expected to increase. A corresponding increase in the amount of MB absorbed may be delayed until pore openings enlarge enough to admit the larger MB molecules.

Figures 33a (magnified view) and b show the voltage versus capacity plots for the second cycle of representative batteries comprising the preceding samples. Samples I-1 and I-2 exhibit a low voltage plateau having substantial capacity (about 200 mAh/g). The capacity of this plateau decreases quickly with % burnoff and is virtually eliminated by about 5% burnoff. As shown in Table 9, the reversible capacity decreases initially with % burnoff, and

then increases above about 10% burnoff. Surface oxide complexes formed during the oxidation process may account for this subsequent increase in capacity. Close examination of the voltage plots for samples I-6 and I-8 in Figure 33b shows that this subsequent increase is associated with lithium insertion near zero volts and extraction above one volt (ie. with substantial hysteresis in the voltage curve). Such high hysteresis capacity is generally unsuitable for lithium ion battery applications.

The irreversible capacity increases with burnoff % approximately linearly with the BET surface area and beginning well before the MB absorption values start to increase. This suggests that the electrolyte molecules are accessing pore surfaces before the MB do (ie. electrolyte molecules are smaller than MB molecules).

The weight loss for the reheated samples is greatest for sample I-6 indicating that the amount of surface oxides is greatest for this sample. Qualitatively, this agrees with previous work in the literature wherein higher temperature oxidation results in fewer surface oxides. Upon reheating, both the reversible and irreversible capacity of the samples are reduced up to about 100 mAh/g, suggesting that the surface oxides play a role in both. The low voltage plateau, present in sample I-1, is not recovered after reheating, even for sample I-3 having only 1.2 % burned off by weight. Thus, even minimal oxidation can seriously, and irreversibly, degrade the performance of the compounds of the invention. The presence of surface oxides can indicate that such oxidation occurred. In turn, an observed weight loss upon heating a carbon sample under inert gas can indicate the presence of such surface oxides.

Additionally, the preceding illustrates the difficulties in quantifying electrolyte accessible surface areas using nitrogen or methylene blue molecules as substitutes for the electrolyte itself. If the latter is intermediate

5

10

Table 9. Summary of characteristics of oxidized samples

Sample No.	T _{max} (°C)	Burnoff Amount (%)	R	R _g (Å)	I ₁ (counts per mg)	MB (μmoles per g)	Surface area (m ² /g)	Reversible Capacity (mAh/g)	Irreversible Capacity (mAh/g)	Weight Loss % after reheating	Reversible Capacity after reheating (mAh/g)	Irreversible Capacity after reheating (mAh/g)
I-1	25	0.0	1.97	5.7	14.0	2.3	63±5	461	122	1.5	-	-
I-2	300	0.7	2.00	5.9	15.2	2.3	104±15	459	171	2.8	-	-
I-3	400	1.2	2.00	6.1	19.2	1.9	316±8	331	365	7.0	305	240
I-4	452	5.1	2.26	6.0	16.9	5.2	384±2	316	487	10.6	-	-
I-5	484	12.5	2.23	6.3	22.6	16.6	553±3	370	456	12.5	-	-
I-6	525	28.2	2.10	6.8	43.3	27.1	579±2	404	529	13.4	305	484
I-7	550	34.0	2.13	6.7	35.8	28.1	591±2	397	526	10.7	-	-
I-8	600	54.6	2.07	6.8	41.6	39.5	797±5	456	546	7.1	-	-

Illustrative Example re small angle scattering

Three precursor materials, i) polyvinylidene fluoride
5 (PVDF), ii) Crowley pitch (tradename), and iii) phenolic
resole resin (product no. 29217 from Occidental Chemical
Corp.), were pyrolyzed at 1000°C and small angle x-ray
scattering data was obtained on each as described above.
10 Figures 34a and b show plots of the intensity versus
scattering angle and $\ln(\text{intensity})$ versus q^2 respectively
for each sample. The resole resin sample shows significant
scattering (intensity) at small angles and the data in
Figure 34b is linear, suggesting that the internal pores
15 are predominantly uniform in size. The data can thus be fit
to the Guinier formula giving $R_g=5.5\text{\AA}$. The resole resin
sample is similar to the B1000 sample from the Phenolic
Resin Examples which shows all the desirable electrochemi-
cal characteristics of the instant invention.

The pyrolyzed PVDF sample also shows significant
20 scattering at small angles but the data in Figure 34b is
non-linear, suggesting the presence of a variety of pore
sizes including pores larger than those of the pyrolyzed
phenolic resole resin. The H/C atomic ratio for this
sample was 0.053, R was 1.23, and the amount of methylene
25 blue absorbed was greater than 40 micromoles per gram. The
reversible and irreversible lithium capacities were 380
mAh/g and 710 mAh/g respectively. This sample has an
unacceptably large electrolyte accessible surface area.

The Crowley pitch (tradename) sample shows minimal
30 small angle scattering indicating that this sample has
minimal porosity. The physical and electrochemical charac-
teristics of this sample are similar to those of other
pyrolyzed cokes. (The H/C atomic ratio for this sample was
0.04 and R was 8.79. The reversible and irreversible
35 lithium capacities were 340 mAh/g and 100 mAh/g respective-
ly.)

As will be apparent to those skilled in the art in the light of the foregoing disclosure, many alterations and modifications are possible in the practice of this invention without departing from the spirit or scope thereof.

- 5 For example, mixtures of more than one precursor may be used to prepare compounds. Additionally, carbohydrate precursors might contain significant matter that is not a carbohydrate, as in the case of wood, shells, cotton or straw. Accordingly, the scope of the invention is to be
10 construed in accordance with the substance defined by the following claims.